



Acoustic Measurement Sensors & Instrumentation





PCB® – Trusted by Companies and Laboratories Worldwide



PCB Piezotronics, Inc. provides a variety of acoustic measurement products, including prepolarized and externally polarized condenser, array, probe, low-profile surface, and special purpose microphones. Microphone products are complemented by an assortment of preamplifiers, signal conditioners, A-weighting filters, handheld calibrators, and accessories.

All PCB® acoustic products are manufactured from the highest quality materials. They are used by a variety of industries and customers including automotive, aerospace & defense, OEM's, universities, consultants, white goods (appliance), and consumer goods manufacturers.

Over 45 Years Experience

PCB® designs, manufactures, and sells sensors worldwide. With over 1000 employees across the globe, there are several Ph.D.'s on our large engineering staff. These skilled resources enable PCB® to offer a variety of products ranging from microphones to accelerometers, force, torque, pressure, load, MEMS sensors, dosimeters, and sound level meters. At PCB®, we understand the complexities of your test environment and requirements, therefore we can recommend the best solution for your application.



Manufacturing Sensors Since 1967!

Innovation

PCB® is the inventor of ICP® technology. PCB® heavily invests in employees, manufacturing, and R&D equipment. This keeps us a leader in sensor technology. Whether it is introducing the industry's first commercial prepolarized high temperature and first prepolarized low noise microphones, or enabling our business partners to measure the lowest noise level in the world with a custom 3" microphone, you can be assured that PCB® is on the leading edge of acoustic design.



Model HT378B02

Performance You Demand at a Price You Can Afford



- Same Day Shipping
- Interchangeable with Other IEPE Compatible Sensors
- ISO 17025 Accredited by A2LA, Recognized by ILAC MRA*
- 5 Year Warranty



1/2" Free-field Prepolarized Microphone and Preamplifier

378B02

- Our most popular model. Ideal for testing in open areas and anechoic chambers
- 3.15 Hz -20 kHz (+/- 2dB)
- TEDS compliant



1/2" Free-field Prepolarized Microphone

377B02

- 50 mV/Pa
- 3.15 Hz -20 kHz (+/- 2dB)
- 15 dBA – 146 dB




1/4" Array Style Prepolarized Microphones

130F20, 130F21 & 130F22

- Value oriented for multichannel audible range testing
- BNC connector, also available with a 10-32, or SMB connector
- TEDS compliant

* Applies to 377 and 378 Series.

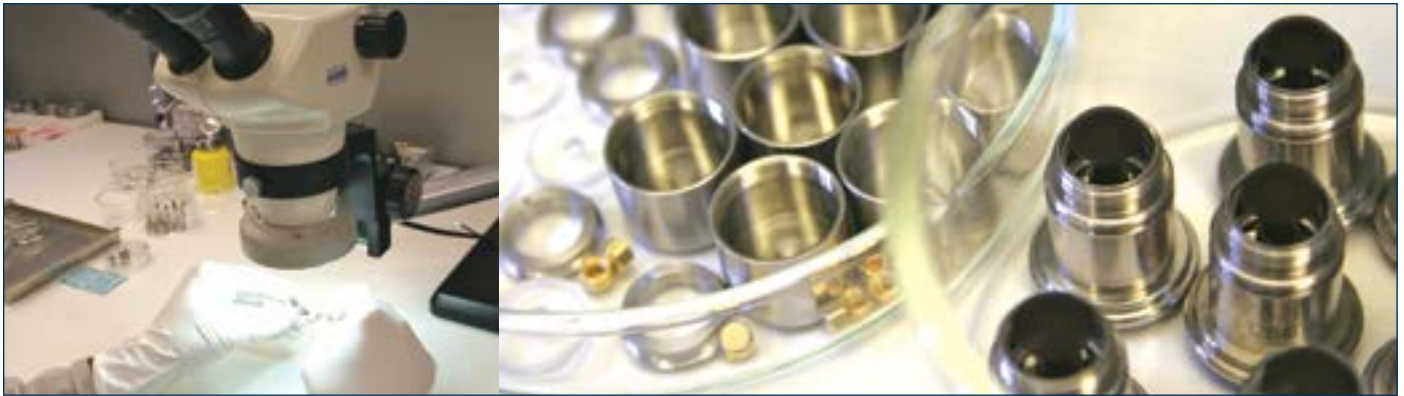

In-house Manufacturing

PCB® uses only the highest quality material and components for its microphones. While other sensor providers outsource their manufacturing, PCB® has invested heavily in on-going employee training as well as in a state of the art, in-house CNC machining facility. This allows us to control all factors that affect quality and delivery. PCB® has made significant investments in our people and operations, including:




High Volume Robotic Machining Cells

PCB's in-house machining facilities control factors that affect quality, production quantities, and delivery. This reduces dependency on outside sources, enables PCB® to meet urgent requests, and keeps cost down so savings can be passed through to our customers.



Laser Welding

Microphones are welded in clean areas to ensure stability and robustness.

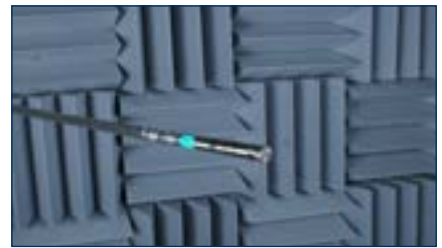

Anechoic Chamber

This special sound proof room enables our large team of engineers to design, test, and verify acoustic sensors.



Clean Rooms

Assembly is performed in clean rooms to ensure consistency and compliance with Working Class IEC standards. Certified professionals manufacture and assemble all microelectronics in controlled environments.



Environmental Chambers

Environmental stress relieving and testing ensures long term stability in the harshest environments.




Nitrogen Storage Chambers

All critical components and assemblies are stored in nitrogen chambers to minimize contamination and maximize stability.



Laser Etching

Model and serial numbers are etched on the microphone assemblies. Large easy-to-read fonts are on the external housings. Disassembly is not required to read these designations.

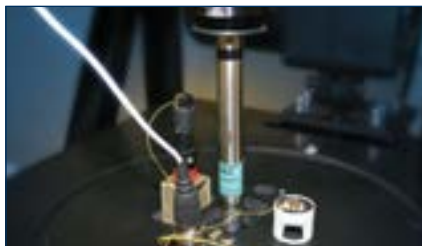

Calibration

Every PCB® microphone and preamplifier is calibrated with traceable certifications. Some competitors only offer sensitivity readings, typical responses, or certifications of compliance.



Inspection

Every PCB® microphone and preamplifier is individually inspected to ensure a quality product gets shipped each and every time.




Selecting the Right Microphone

There are several product options to consider when choosing a microphone and preamplifier system to measure sound or unwanted sound, called noise. In some cases, multiple products can be used for the same application. The PCB® Microphone Handbook provides detailed information about microphone selection, maintenance, calibration, associated standards, and more. To download this handbook, visit www.pcb.com/acoustics.

Microphone Field Types

Free-field Response

Free-field microphones are designed for use in environments without reflections. They are ideal for outdoor applications, as well as laboratory applications in an anechoic chamber. Common free-field testing includes automotive pass-by, loudspeakers, appliances, and disk drive sound measurements.

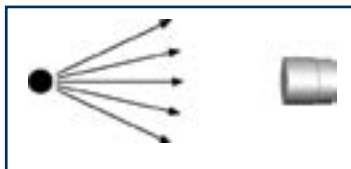

Free-field



Sound Source Location for Noise Reduction




Pressure Response

Pressure microphones are specifically designed to be flush-mounted to a surface at the boundary of the sound field. This allows accurate measurement of sound pressure in ducts, wind tunnels, and couplers. Pressure microphones are ideal for use as reference microphones, as they are designed to have very flat frequency response within a sound coupler or calibrator. Pressure microphones are also required for most ear simulator applications.



Image courtesy of Spectronics, Inc.


Flush Mounted Microphone Measurements in an Impedance Tube




Pressure Response

Random Incidence Response

Random incidence microphones are designed for use in areas where the sound field could come from any direction. The best uses for these microphones are to perform measurements in reverberant chambers and for many indoor noise applications. They are well suited for room acoustics, as well as for aerospace and automotive cabin noise measurements.

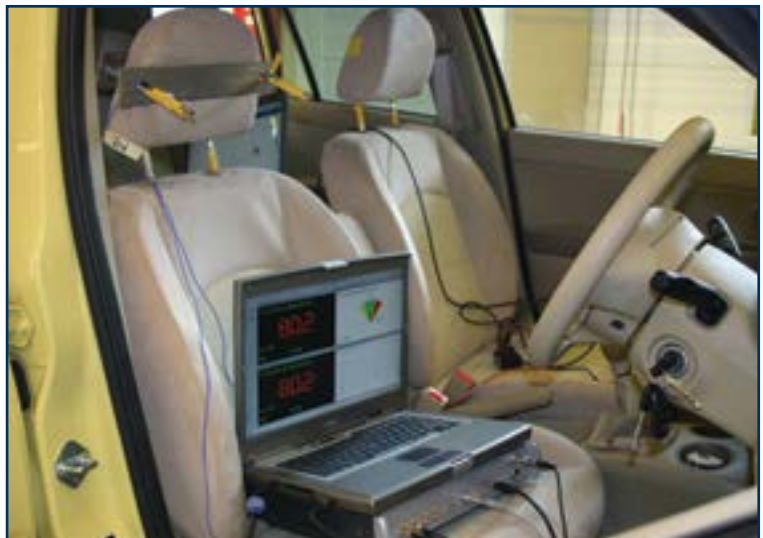

Cabin Noise Measurements for Rider Comfort




Random Incidence




Microphone Comparison

PREPOLARIZED (0 V)

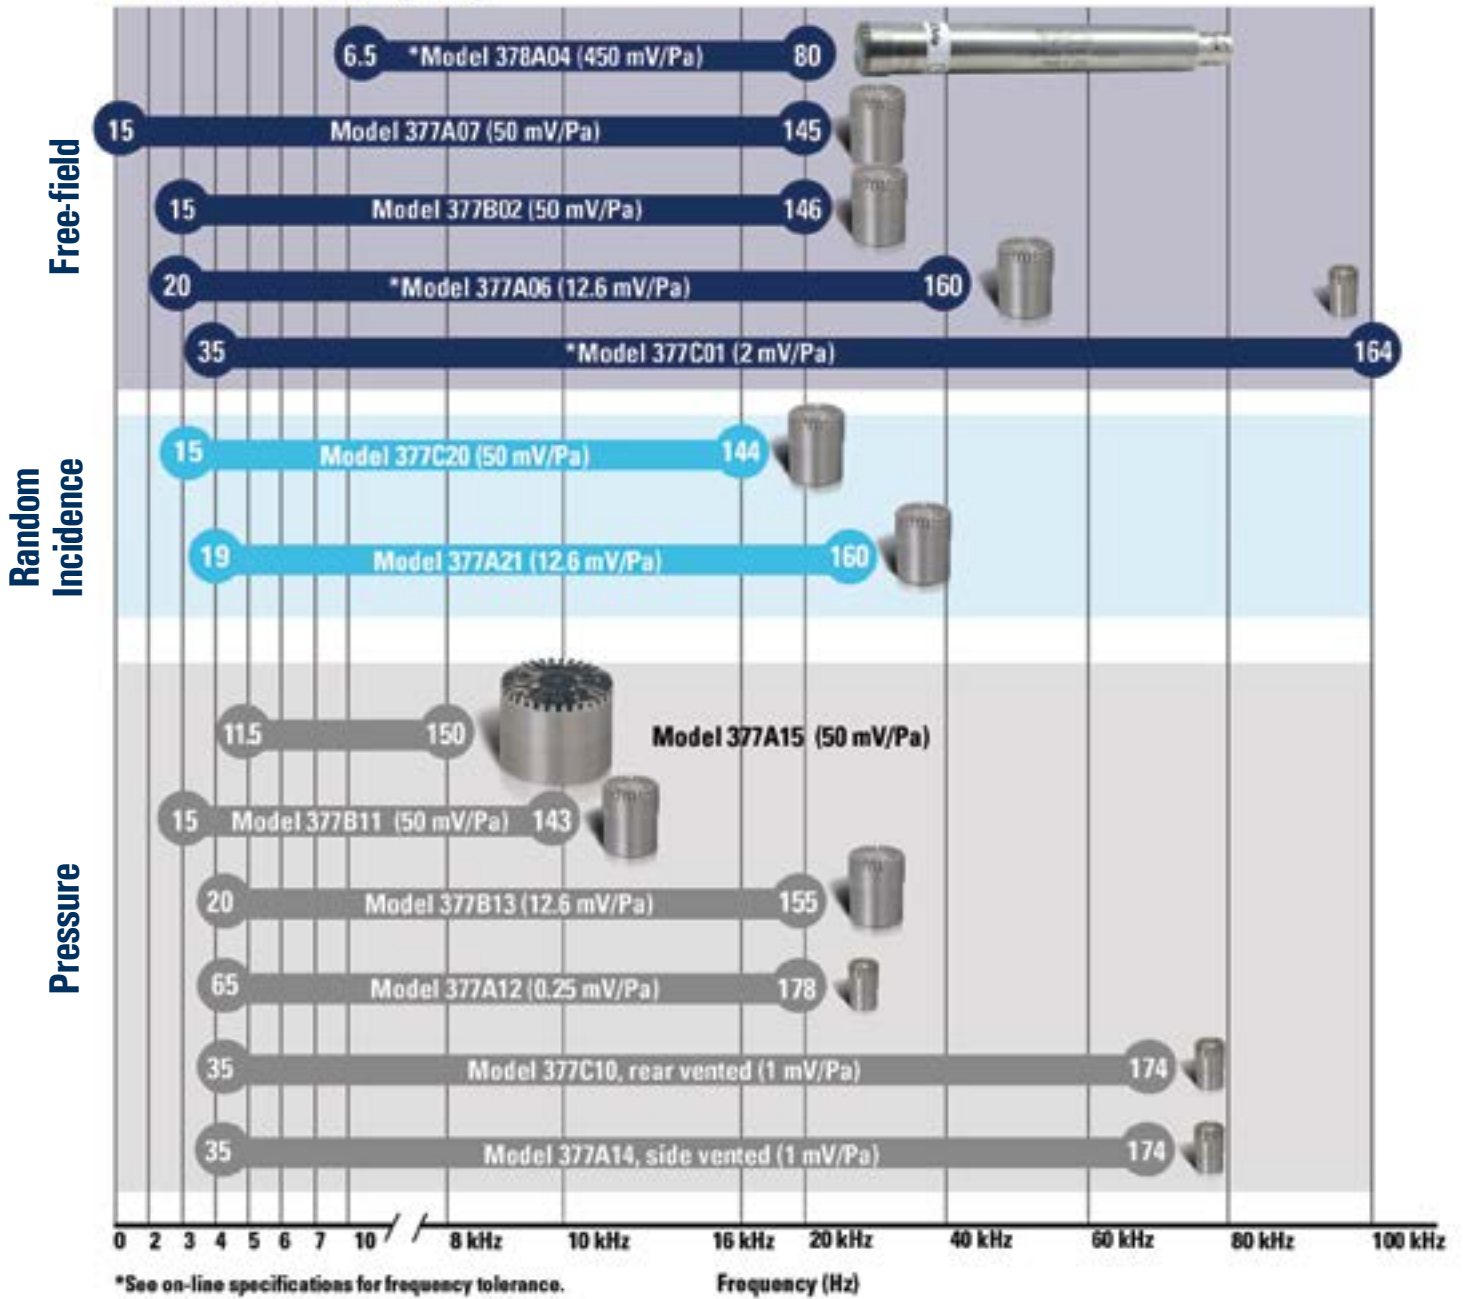


Example:

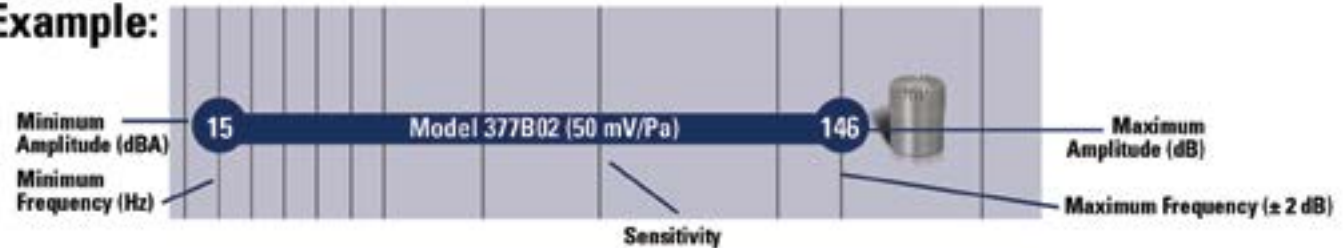



EXTERNALLY POLARIZED (200 V)

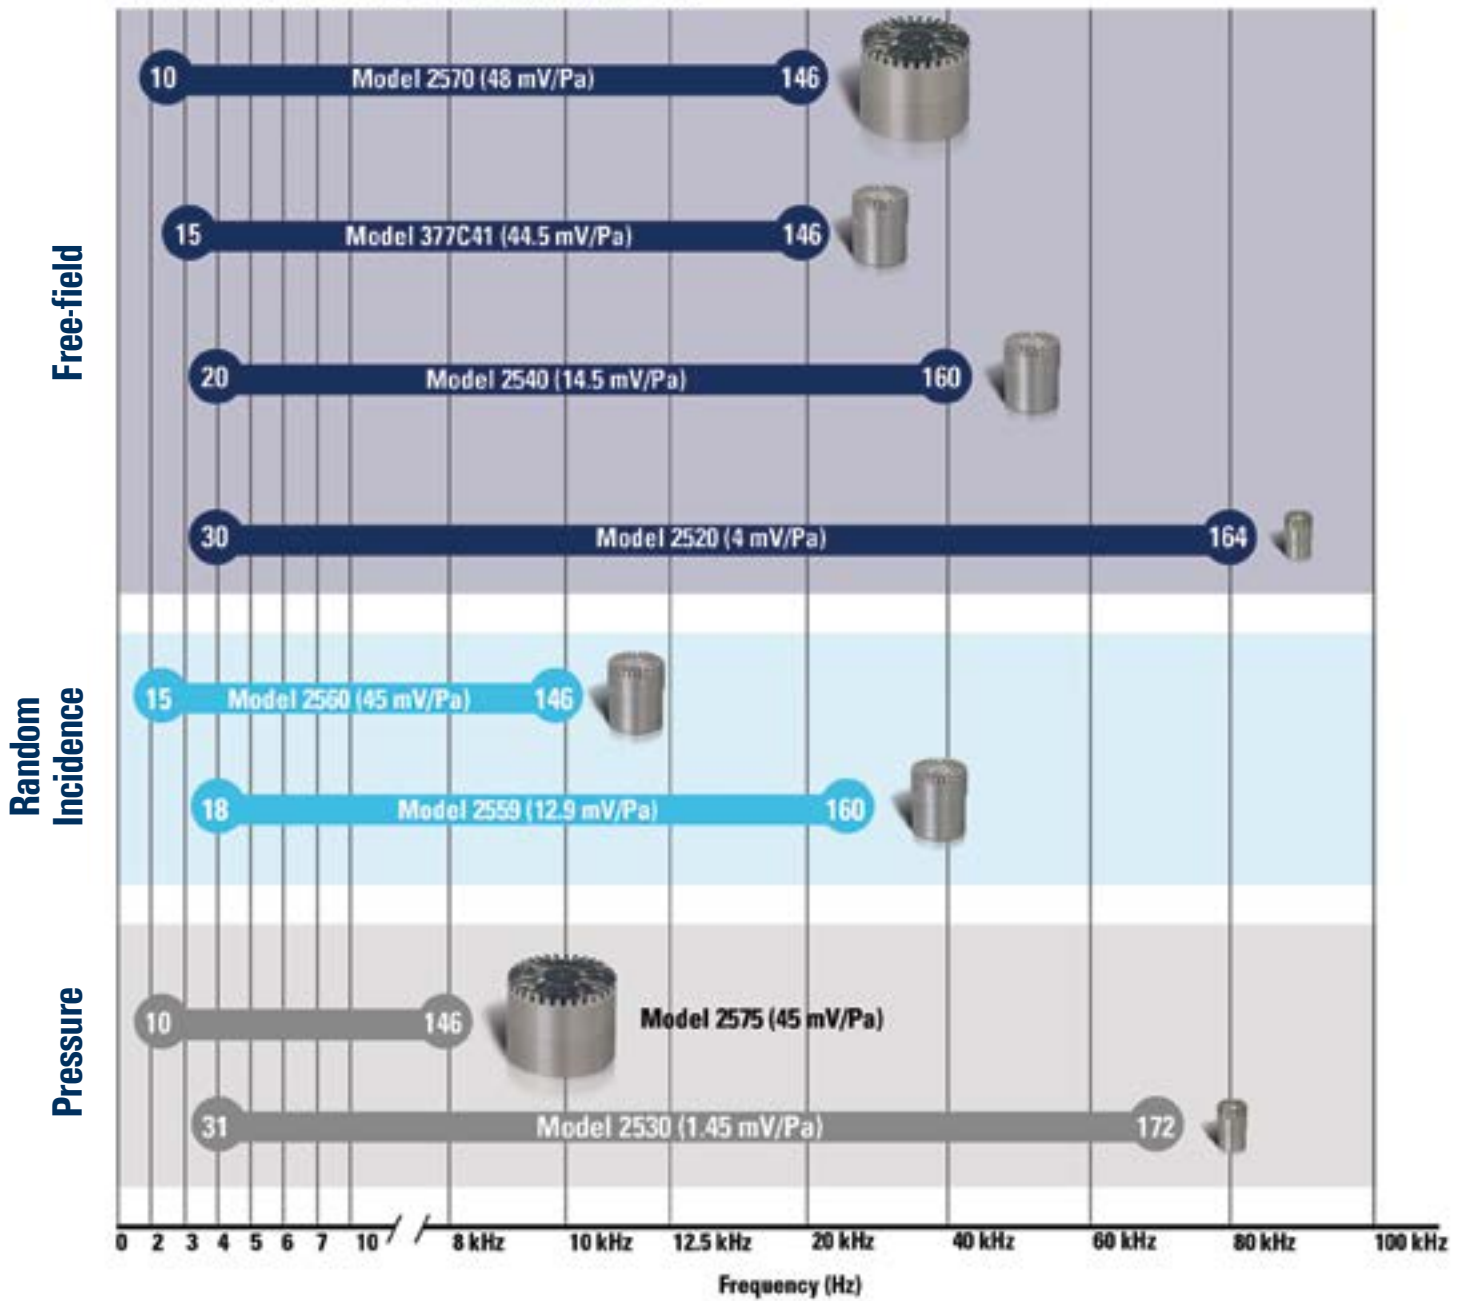

Size:





Prepolarized ICP® Precision Condenser Microphones and Preamplifiers

Prepolarized microphones have many advantages over externally polarized models. They use low power circuitry and do not require an external polarization voltage. PCB® invented ICP® power. Applying a polymer coating to the top of the backplate and embedding a charge on it eliminates the need for expensive 200 V power supplies and cables, and allows use of a 2-20 mA constant current supply or signal conditioner as the power source.

Prepolarized microphones are especially useful in applications that require battery powered equipment. Prepolarized microphones are less susceptible to the influence of high humidity environments because of the high electrical resistance of the polymer coating on the backplate.

Prepolarized microphone systems use common coaxial cables with BNC connectors and can be shared with other ICP® compatible products including: accelerometers, force, and pressure sensors. Portability and interchangeability with other sensors minimizes test set-up time and reduces the cost per-channel.



Computer Fan and Disk Drive Noise Test (Model 378A04)



Phantom Powered Microphones and Preamplifier



Hazardous Approved Microphone & Preamplifier Model EX378B02

| TEDS Microphone & Preamplifier Systems, IEEE 1451.4 Compliant | | | | | | | | | | |
|---|--|---|--|--|---|---|---|--|---|---|
| | Free-field System | | | | | | | | | |
| TEDS Version 1.0 | 378C01 | 378B02 | EX378B02 | HT378B02 | 378A04 | 378A06 | 378A07 | 376A31 | 376A32 | 376A33 |
| Mated Pair System Components | 377C01 426B03 | 377B02 426E01 | Single piece construction | 377B02 HT426E01 | Single piece construction | 377A06 426E01 | 377A07 426E01 | 377C01 426A14 | 377B02 426A14 | 377A06 426A14 |
| Diameter | 1/4" | 1/2" | 1/2" | 1/2" | 1/2" | 1/2" | 1/2" | 1/4" | 1/2" | 1/2" |
| Notes | High amplitude, high frequency measurements | Audible range, low to medium amplitudes, most common | Intrinsically safe | High temperature version of 378B02 | Extreme low noise measurements | Medium to high amplitude and frequency measurements | Extreme low frequency infrasound measurements | High amplitude, high frequency measurements | Audible range, low to medium amplitudes | Medium to high amplitude and frequency measurements |
| Application | Ultrasound, blast, gunshot, noise identification | Pass-by, noise identification, sound power, sound intensity, Class 1 sound level meters | For use in hazardous locations, leak detection, mining | Engine analysis, exhaust testing, HVAC, leak detection | Computer fan and disk drives, appliance testing, electric vehicle sound quality | Railway and horn testing, alarm monitoring | Wind turbine testing, sonic boom detection | Clarity and life cycle testing for musical equipment | Speaker design and "Rub and Buzz" noise testing | Live and studio recording |

Transducer Electronic Data Sheets (TEDS) enhance the identification of each microphone. All PCB® microphone and preamplifier systems come standard with TEDS functionality and are compliant with the IEEE 1451.4 standard.

| | Pressure System | | | | | Random Incidence System | | | |
|------------------------------|--|---|---|---|---|---|--|------------------------------------|--|
| TEDS Version 1.0 | 378A12 | 378A14 | 378C10 | 378B11 | 378A13 | 378A21 | 378C20 | HT378C20 | |
| Mated Pair System Components | 377A12 426A03 | 377A14 426A05 | 377C10 426B03 | 377B11 426E01 | 377A13 426E01 | 377A21 426E01 | 377C20 426E01 | 377C20 HT426E01 | |
| Diameter | 1/4" | 1/4" | 1/4" | 1/2" | 1/2" | 1/2" | 1/2" | 1/2" | |
| Notes | Extreme high amplitude measurements | High frequency, high amplitude measurements side vented | High frequency, high amplitude measurements rear vented | High sensitivity, low frequency, low noise measurements | Mid range frequency and amplitude measurements | Medium to high amplitude and frequency measurements | Audible range, high sensitivity, low - medium amplitudes | High temperature version of 378C20 | |
| Application | Blast detection, cavity analysis, gunshot noise measurements | Ultrasound, impedance tubes, cavity analysis | Ultrasound, impedance tubes, cavity analysis | Infrasound, impedance tubes, cavity analysis, panel testing | Impedance tubes, cavity analysis, panel testing | Cabin noise, consumer product testing | Cabin testing, environmental noise, room acoustics, Class 1 sound level meters | Environmental noise, HVAC testing | |

Engineered to Maximize System Performance

For optimum performance, PCB® matches the microphone and preamplifier to complement each other. The model 378 microphone system series takes the precision and durability of the standard model 377 microphone series line and mates it with one of PCB's model 426 preamplifiers. This system approach provides a convenient and user friendly option for purchasing acoustic measurement equipment and allows for use of TEDS to store calibration data.



1/4" Microphones
Models
377C01
377C10
377A12
377A14

1/2" Microphones
Models
377B02
377A06
377A07
377B11
377B13
377C20
377A21

1" Microphone
Model 377A15

1/2" Preamplifier Model 426A11

1/2" Preamplifier Models HT426E01, 426E01, 426A10

1/4" - 1/2" Preamplifier Model 426A14

1/4" Short Preamplifier Model 426A07

1/2" Short Preamplifier Model 426A13

1/4" - 1/2" Preamplifier Model 426A14

Prepolarized (0 V) Precision Condenser Microphones

| Model Number | Free-field | | | | Pressure | | | | | | Random Incidence | |
|---|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| | 377C01 | 377B02 | 377A06 | 377A07 | 377A12 | 377A14 | 377C10 | 377B11 | 377B13 | 377A15 | 377C20 | 377A21 |
| Diameter | 1/4" | 1/2" | 1/2" | 1/2" | 1/4" | 1/4" | 1/4" | 1/2" | 1/2" | 1" | 1/2" | 1/2" |
| Open Circuit Sensitivity | 2 mV/Pa | 50 mV/Pa | 12.6 mV/Pa | 50 mV/Pa | 0.25 mV/Pa | 1 mV/Pa | 1 mV/Pa | 50 mV/Pa | 12.6 mV/Pa | 50 mV/Pa | 50 mV/Pa | 12.6 mV/Pa |
| Frequency Range (± 2 dB) | 4 Hz to 80 kHz | 3.15 Hz to 20 kHz | 3 Hz to 31.5 kHz | 0.07 Hz to 20 kHz | 4 Hz to 20 kHz | 4 Hz to 70 kHz | 4 Hz to 70 kHz | 3.15 Hz to 10 kHz | 4 Hz to 20 kHz | 5 Hz to 8 kHz | 3.14 Hz to 16 kHz | 4 Hz to 25 kHz |
| Dynamic Range Upper Limit - 3% Distortion Limit [1] | 164 dB | 146 dB | 160 dB | 145 dB | 178 dB | 174 dB | 174 dB | 143 dB | 155 dB | 150 dB | 144 dB | 160 dB |
| Dynamic Range Lower Limit - Cartridge Thermal Noise [1] | 35 dB (A) | 15 dB (A) | 20 dB (A) | 15 dB (A) | 65 dB (A) | 35 dB (A) | 35 dB (A) | 15 dB (A) | 20 dB (A) | 11.5 dB (A) | 15 dB (A) | 19 dB (A) |
| Temperature Range | -40 to +248 °F -40 to +120 °C | -40 to +302 °F -40 to +150 °C | -40 to +248 °F -40 to +120 °C | -40 to +248 °F -40 to +120 °C | -40 to +248 °F -40 to +120 °C | -40 to +248 °F -40 to +120 °C | -40 to +248 °F -40 to +120 °C | -40 to +248 °F -40 to +120 °C | -40 to +248 °F -40 to +120 °C | -40 to +248 °F -40 to +120 °C | -40 to +248 °F -40 to +120 °C | -40 to +248 °F -40 to +120 °C |

Notes

[1] re 20 µPa

These low noise, general purpose, preamplifiers are powered by any constant current (2-20 mA) ICP® sensor power supply. They are designed to be used with prepolarized microphones.

CE **TEDS** COMPATIBLE All preamplifiers are CE marked and contain TEDS memory circuitry.

ICP® Preamplifiers for Prepolarized Microphones

| Model Number | 426B03 | 426A05 | 426A07 | 426E01 | HT426E01 | 426A10 | 426A11 | 426A13 | 426A14 |
|-------------------------------|---------------------------------|-----------------------------------|---------------------------------|---------------------------------|----------------------------------|---------------------------------|--------------------------------|---------------------------------|---------------------------------|
| Microphone Diameter | 1/4" | 1/4" | 1/4" | 1/2" | 1/2" | 1/2" | 1/2" | 1/2" | 1/4" & 1/2" |
| Gain (Attenuation) | -0.08 dB [1] | -0.19 dB [1] | -0.19 dB [1] | -0.05 dB [1] | -0.06 dB [2] | -0.1 dB [1] | -0.16 dB [1] | -0.20 dB [1] | -0.20 dB [1] |
| Frequency Response (± 0.1 dB) | 5 Hz to 126 kHz | 5 Hz to 126 kHz | 2.5 Hz to 126 kHz | 6.3 Hz to 125 kHz | 6.3 Hz to 126 kHz | 80 Hz to 125 kHz | 5 Hz to 125 kHz | 10 Hz to 126 kHz | 11 Hz to 100 kHz |
| Electrical Noise (A-weight) | ≤ 3.2 µV [1] | ≤ 3.2 µV [1] | ≤ 2.5 µV [1] | ≤ 2.8 µV [1] | ≤ 4.9 µV [2] | ≤ 3.6 µV [1] | ≤ 7.5 µV [1] | ≤ 3 µV [1] | ≤ 2 µV [1] |
| Electrical Noise (Linear) | ≤ 5.6 µV [1] | ≤ 5.6 µV [1] | ≤ 5.6 µV [1] | ≤ 5 µV [1] | ≤ 13.4 µV [2] | ≤ 11.2 µV [1] | ≤ 5.7 µV [1] | ≤ 6 µV [1] | ≤ 4.5 µV [1] |
| Output Voltage (Maximum) | ± 8 V pk | ± 8 V pk | ± 8 V pk | ± 7 V pk | ± 7 V pk | ± 7 V pk | ± 5 V pk | ± 8 V pk | ± 10 V pk |
| Temperature Range | -40 to +158 °F -40 to +70 °C | -40 to +158 °F -40 to +70 °C | -40 to +158 °F -40 to +70 °C | -40 to +176 °F -40 to +80 °C | -40 to +257 °F -40 to +125 °C | -40 to +176 °F -40 to +80 °C | -4 to +158 °F -20 to +70 °C | -40 to +158 °F -40 to +70 °C | -40 to +149 °F -40 to +65 °C |
| Output Connector | 10-32 Coaxial jack | 10-32 Coaxial jack | 10-32 Coaxial jack | BNC jack | BNC jack | BNC jack | BNC jack | BNC jack | 3 Pin XLR |
| TEDS IEEE 1451.4 | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | No |
| Application | General purpose | Used with side vented microphones | Confined areas | General purpose | High temperature | High pass filter | Gain, filter | Confined areas | Audio applications |

Notes

[1] Measured with an 18 pF reference microphone [2] Measured with a 12 pF reference microphone



Prepolarized ICP® Array Microphones

Prepolarized ICP® array microphones are a cost-effective alternative to the higher end, test and measurement microphones. They are suitable for sound measurements within the normal human hearing range. Array microphones have excellent phase characteristics and can be combined with the appropriate software to effectively map acoustic energy flow. The number of microphones, spacing and predetermined patterns, which are typically dictated by the software and application, allow you to analyze spatial transformation of complex sound fields to understand hot spots. The location of a noise source can be pinpointed and the speed and direction of sound can be determined.

These value-priced array microphones are an excellent choice for large channel count applications such as noise identification, nearfield acoustic holography, sound pressure mapping, acoustic cameras, and beamforming.

All PCB® array microphones come standard with Transducer Electronic Data Sheets (TEDS) for microphone identification.

Highlights

- Low Per Channel Cost
- Powered by ICP® Sensor Signal Conditioners
- Integrated Preamplifier
- Water & Dust Resistant Model Available

Applications

- Holography
- Sound Pressure Mapping
- Noise Source Identification
- Beamforming



Water and Dust Resistant Microphone
Model 130A24



(SMB Connector)
Model 130A23



(BNC Connector)
Model 130F20




(10-32 Connector)
Model 130F21



(SMB Connector)
Model 130F22



Low Profile Surface Microphone
Model 130B40

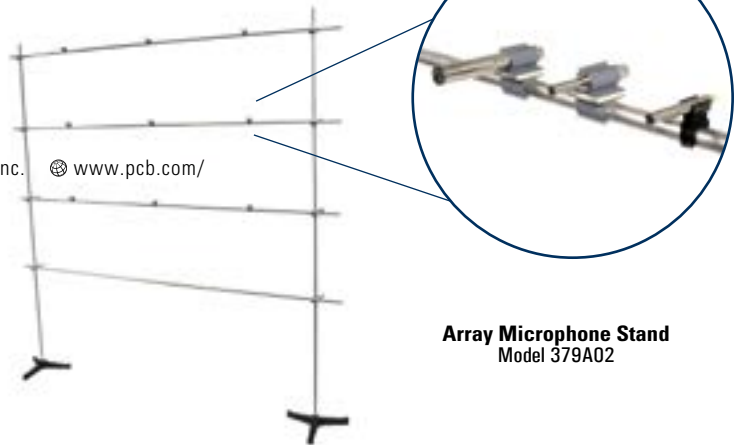

Array Microphone Stand
Model 379A02

PCB Piezotronics, Inc. www.pcb.com/acoustics



All array microphones are CE marked and contain IEEE 1451.4 TEDS memory circuitry.

ICP® Array Microphones with Integral Preamplifier

| Model Number | 130A23 | 130A24 | 130F20 | 130F21 | 130F22 | 130B40 |
|--------------------------------|------------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|--|
| Microphone Diameter | 1/4" | 1/2" | 1/4" [4] | 1/4" | 1/4" | 1/4" |
| Response | Free-field | Free-field | Free-field | Free-field | Free-field | Pressure |
| Sensitivity (± 3 dB at 250 Hz) | 14 mV/Pa | 10 mV/Pa | 45 mV/Pa | 45 mV/Pa | 45 mV/Pa | 8.5 mV/Pa |
| Frequency response (± 2 dB) | 20 Hz to 20k Hz | 20 Hz to 16k Hz [5] | 10 Hz to 20k Hz [1] | 10 Hz to 20k Hz [1] | 10 Hz to 20k Hz [1] | 20 Hz to 10k Hz [2] |
| Dynamic Range | 30 dBA to 143 dB [3] | 30 dBA to 143 dB [3] | 26 dBA to 122 dB | 26 dBA to 122 dB | 26 dBA to 122 dB | 32 dBA to 142 dB [3] |
| Polarized Voltage | 0 V | 0 V | 0 V | 0 V | 0 V | 0 V |
| Temperature Range | +14 to +122 °F -10 to +50 °C | +14 to +122 °F -10 to +50 °C | +14 to +122 °F -10 to +50 °C | +14 to +122 °F -10 to +50 °C | +14 to +122 °F -10 to +50 °C | -40 to +176 °F -40 to +80 °C |
| Connector | SMB socket | BNC jack | BNC jack | 10-32 jack | SMB socket | 10-32 jack |
| Application | High frequency and high amplitudes | Rugged water and dust resistant | General purpose | General purpose | Quick release connectivity | Low profile and surface mount minimizes wind noise |

Notes

[1] ± 4 dB. [2] ± 3 dB, 20 to 20k Hz ± 6 dB. [3] 150 dB max without clipping. [4] 1/2" preamplifier diameter. [5] ± 3 dB



Externally Polarized Precision Condenser Microphones and Preamplifiers

Externally polarized microphones were the original standard for all acoustic measurement applications. This design utilizes a separate 200 V power supply and special cables with 7 pin style connectors. Their ease of design enables a large product offering. Externally polarized microphones are typically used to replace microphones in existing systems or when a prepolarized alternative is not available.



Building and Room Acoustic Analysis




- | | | |
|---|---|---|
| <p>1/4" Microphones Models 2520 2530</p> | <p>1/2" Microphones Models 2540 2559 2560 377C41</p> | <p>1" Microphones Models 2570 2575</p> |
|---|---|---|

| Externally Polarized (200 V) Precision Condenser Microphone Cartridges | | | | | | | | |
|--|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Model Number | Free-field | | | | Pressure | | Random Incidence | |
| | 2520 | 2540 | 377C41 | 2570 | 2530 | 2575 | 2559 | 2560 |
| Diameter | 1/4" | 1/2" | 1/2" | 1" | 1/4" | 1" | 1/2" | 1/2" |
| Open Circuit Sensitivity | 4 mV/Pa | 14.5 mV/Pa | 44.5 mV/Pa | 48 mV/Pa | 1.4 mV/Pa | 45 mV/Pa | 12.9 mV/Pa | 45.2 mV/Pa |
| Frequency Range (± 2 dB) | 4 Hz to 80 kHz | 4 Hz to 40 kHz | 3.15 Hz to 20 kHz | 2.6 Hz to 20 kHz | 4 Hz to 70 kHz | 2.6 Hz to 80 kHz | 4 Hz to 25 kHz | 2.6 Hz to 10 kHz |
| Dynamic Range Upper Limit - 3% Distortion Limit [1] | 164 dB | 160 dB | 146 dB | 146 dB | 172 dB | 146 dB | 160 dB | 146 dB |
| Dynamic Range Lower Limit - Cartridge Thermal Noise [1] | 30 dB (A) | 20 dB (A) | 15 dB (A) | 10 dB (A) | 31 dB (A) | 10 dB (A) | 18 dB (A) | 15 dB (A) |
| Temperature Range | -40 to +302 °F -40 to +150 °C | -40 to +302 °F -40 to +150 °C | -40 to +302 °F -40 to +150 °C | -40 to +302 °F -40 to +150 °C | -40 to +302 °F -40 to +150 °C | -40 to +302 °F -40 to +150 °C | -40 to +302 °F -40 to +150 °C | -40 to +302 °F -40 to +150 °C |

Notes
[1] re 20 µPa

Preamplifiers for Externally Polarized Microphones
Model 426A30 is a rugged 1/2" diameter preamplifier optimized for use with externally polarized microphones. It is compatible with microphones as defined in the international standard IEC 61094, and connects to a 200 V power supply requiring a 7 pin cable with connectors. Model 426B31 is a 1/4" diameter preamplifier with integral 10 ft. cable that terminates with a 7 pin connector.

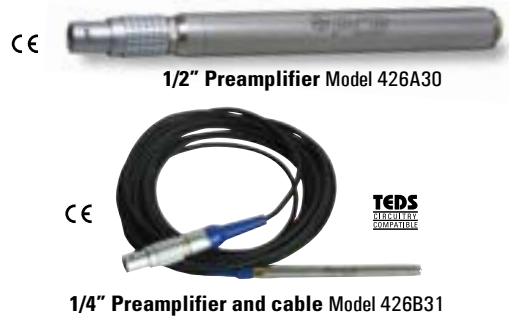

| Preamplifiers | | |
|-------------------------------|--------------------------------|---------------------------------|
| Model Number | 426B31 | 426A30 |
| Diameter | 1/4" | 1/2" |
| Gain (Attenuation) | -0.14 dB [2] | -0.2 dB [1] |
| Frequency Response (± 0.5 dB) | 3.98 Hz to 126 kHz | 3.0 Hz to 126 kHz |
| Electrical Noise (A-weight) | ≤ 4.8 µV [2] | ≤ 2.8 µV [1] |
| Electrical Noise (Linear) [1] | ≤ 12 µV [2] | ≤ 5 µV [1] |
| Output Voltage (Maximum) | ± 25 V pk | ± 14 V pk |
| Temperature Range | -4 to +167 °F -20 to +75 °C | -40 to +185 °F -40 to +85 °C |
| Output Connector | Integral Cable with 7 Pin | 7 Pin |
| TEDS IEEE 1451.4 | Yes | No |

Notes
[1] Measured with an 18 pF reference microphone [2] Measured with a 6.8 pF reference microphone

Microphone Power Supply

- 0 V and 200 V polarization options
- Extended battery life (40 hours)
- 0, 20, and 40 dB gain
- Selectable flat (Z), A, and C-weighting




Microphone Preamplifier Power Supply Model 2221



Additional Acoustic Products and Accessories

High Temperature Probe Microphone (up to 800°C)


Model 377B26 Prepolarized Probe Microphone is designed for use in difficult measurement situations, such as small cavities and very high temperatures. The acoustic signal is guided to the microphone through a detachable, stainless-steel probe. The high acoustic input impedance of the probe tip minimizes its influence on the acoustic field. Probe microphones are internally compensated to equalize the static pressure at the probe tip with the internal microphone pressure.



In-line "A-weighting" Filter

Model 426B02 In-line A-weighting Filter is powered by constant current excitation and is compatible with ICP® microphone preamplifiers. When using this filter, a minimum of 4 mA excitation current is required of the ICP® sensor signal conditioner or readout device which incorporates ICP® sensor power.

CE

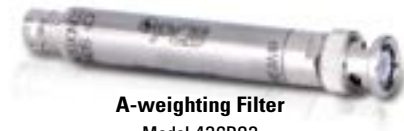

A-weighting Filter
Model 426B02



Adaptors

- 079A02 – 1/4" Microphone to 1/2" Preamplifier Adaptor
- 079B03 – 1/2" Microphone to 1/4" Preamplifier Adaptor
- 079B25 – 1" Microphone to 1/2" Preamplifier Adaptor
- 079A24 – Tripod Stand Adaptor to Convert 5/8" Stud to 1/4" for Microphone Holder
- 079A29 – Swivel Head, Stand to Holder Adaptor
- 079A41 – Right Angle Adapter for 1/4" Microphone
- 079A42 – Right Angle Adapter for 1/2" Microphone



Cables (additional lengths available)

- EXA010 – 10' Cable with 7 Pin Connector
- 003C10 – 10' Coaxial Cable with 10-32 Plug and BNC Plug
- 003D10 – 10' Coaxial Cable with BNC Plugs
- 003U10 – 10' Coaxial Cable with SMB Plugs
- 003V10 – 10' Coaxial Cable with SMB Plug and BNC Plug
- 003V30 – 30' Coaxial Cable with SMB Plug and BNC Plug



Calibration Accessories

- ADP021 – CAL250 to 1/4" Microphone Adaptor
- ADP024 – CAL200 to 1/4" Microphone Adaptor
- 079A31 – 8-Channel Coupler for the CAL250 Calibrator



079A06



079A07



079A53



EPS2116



079C20



079B21

Environmental Protection

- 079A06 – 3-1/2" Windscreen for 1/2" Microphone
- 079A07 – 3-1/2" Windscreen for 1/4" Microphone
- 079C20 – Nose Cone for 1/4" Microphone
- 079B21 – Nose Cone for 1/2" Microphone
- 079A53 – 3/4" Windscreen for 1/4" Microphone
- EPS2116 – Outdoor Protection, 3/4" Mount and 1/4" Side Exit Mount



079B10

079A11

079C23

079B32

079A13

079A49

Holders

- 079B10 – Holder for 1/4" Microphone
- 079A11 – Holder for 1/2" Microphone
- 079C23 – Swivel Head with 1/4" and 1/2" Holders
- 079B32 – Clip Holder for 1/4" Microphone
- 079A13 – Clip Holder for 1/2" Microphone
- 079A49 – Holder for phantom powered preamplifier



079A15

079B16

079A17

079A18

079A44

379A02

Stands and Mounts

- 079A15 – Tripod Stand with Boom Arm
- 079B16 – Miniature Tripod Stand with Adjustable Legs
- 079A17 – Camera Tripod Stand
- 079A18 – Adjustable Clamp
- 079A44 – 5 Link Extension Arm for Clamp Holders
- 379A02 – Array Microphone Stand



Battery Powered ICP® Sensor Signal Conditioner Model 480C02



USB Dual Channel ICP® Sensor Signal Conditioner Model 485B36



3-Channel Battery Powered ICP® Sensor Signal Conditioner Model 480B21



Battery Powered ICP® Sensor Signal Conditioner 4 mA, Gain x1, x10, x100 Model 480M122



8-Channel ICP® Sensor Signal Conditioner Model 483C05



4-Channel ICP® Sensor Signal Conditioner 4 to 20 mA Model 482C05

ICP® Signal Conditioners



Additional Acoustic Products offered by PCB®



Sound Level Meters

Model 831

The Model 831 is the most recent Larson Davis sound level meter platform. This model provides superior performance, reliability, and 2GB of internal memory. Various firmware modules expand the functionality of Model 831 for a variety of environmental noise and architectural acoustics measurements. The Model 831 also includes the easy-to-use personal health and safety measurement features of other advanced SLM products.



CE

Soundtrack LxT®

The SoundTrack LxT® sound level meter represents a significant advance in performance, reliability, and ease-of-use. This ergonomically designed meter ensures that gathering, analyzing, and presenting detailed workplace and environmental noise data is simple, fast, and accurate.



Please visit www.LasonDavis.com for further details.



Environmental Protection Shrouds

Model EPS2116

Environmental shrouds are complete weather protection systems for 1/2" microphone systems. The environmental shrouds are the perfect choice for longer-term measurements in inclement weather. Their special acoustic windscreen material and configuration protect the microphones from rain, sleet, and snow. The shroud seals the preamplifier in a desiccated chamber, thus preserving performance in high humidity environments. The desiccant volume is many times greater than that of inline desiccant cartridges, for lasting protection without interference between the microphone and preamplifier. The shroud is also equipped with bird-spikes to deter winged intruders.



Outdoor Preamplifier & Microphone with Calibration Check

The Larson Davis PRM2103-FF is designed to be used with the Model 831 sound level meter and an environmental shroud. It can be used in a wide range of weather conditions.

The PRM2103-FF provides a five frequency calibration check which is automatically controlled by the Model 831 sound level meter. It does not require routine maintenance. It includes a built-in humidity and temperature sensor and can automatically turn on an internal heater when there is a risk of condensation. The low power usage makes the PRM2103-FF an excellent solution for battery powered applications.



Acoustic Calibration Products

Precision Handheld Acoustic Calibrators

PCB® offers calibrators for microphones that meet IEC 60942 and ANSI S1.40 standards. These units are easy-to-use and available with optional adaptors for use with a variety of microphone diameters. Calibrators are lightweight, portable, and battery operated.



| Precision Calibrators | | |
|----------------------------------|----------------------------|--|
| Model Number | CAL200 | CAL250 |
| Microphone Sizes | 1/4" (6 mm)*, 1/2" (12 mm) | 1/8" (3 mm)*, 1/4" (6 mm)*, 1/2" (12 mm), 1" (25 mm) |
| Frequency | 1 kHz ± 1% | 251.2 Hz ± 2 Hz |
| Output Level (re 20 µPa) | 94 dB, 114 dB ± 0.2 dB | 114 ± 0.1 dB |
| Barometric Pressure Compensation | Automatic | Automatic |
| ANSI S1.40 | Yes | Yes |
| IEC 60942 Class 1 | Yes | Yes |
| Notes: | * With optional adaptors | |

Turnkey Acoustic Calibration Workstation, Model 9350C

The Precision Acoustic Calibration Workstation Model 9350C is an accurate, turnkey, automated, PC-based system. The 9350C offers efficient and cost-effective calibration of 1/4", 1/2", and 1" microphone cartridges (open-circuit sensitivity), microphone cartridges with preamplifiers (closed-circuit sensitivity), and microphone frequency response function. In addition, the system provides for conformance testing of microphone preamplifiers, and acoustic calibrators.

The 9350C generates ISO 17025 compliant calibration certificates for:

- Microphone Cartridge Calibration
- Microphone and Preamplifier Calibration
- Preamplifier Conformance Test
- Source Calibration (example: pistonphone)

The Modal Shop also provides extensive rental services through a vast inventory of microphones, preamplifiers, and sound level meters. Visit www.modalshop.com.




Acoustic Calibration Services

PCB® has a "State-of-the-Art" Acoustic Calibration System

All microphone calibrations include test documentation showing the actuator response, corrected responses, the conditions under which the calibration was performed, and the equipment used. Calibrations are performed with reference microphones traceable to national laboratories specializing in acoustic measurements (NIST, PTB, or DFM). PCB's quality management system is certified to AS9100 and ISO9001. PCB's calibration service is accredited to ISO17025 & ANSI-Z540.3 by A2LA (see ILAC MRA) and compliant with ISO10012.

PCB® is equipped to calibrate most competitors' microphones and preamplifiers. www.PCB.com/sensor-calibration/calibration-services

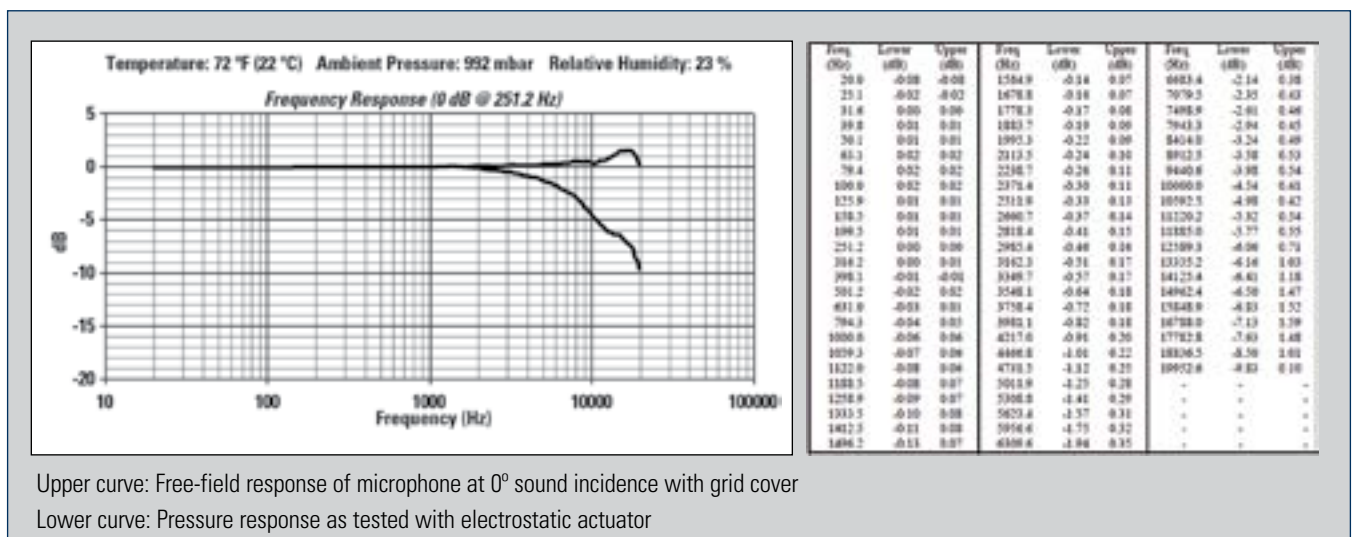

Upper curve: Free-field response of microphone at 0° sound incidence with grid cover
 Lower curve: Pressure response as tested with electrostatic actuator



PCB PIEZOTRONICS

- ☆ Corporate HQ/Campus – Depew, New York, USA
- PCB US Operations
- △ PCB Offices – Canada, France, Germany, Benelux, Italy, UK, China
- Major Distributors

Total Customer Satisfaction

Visit www.pcb.com for a directory of over 120 international distributors, or call to schedule an assessment of your requirements by a local Application Engineer.



www.pcb.com

AS9100 CERTIFIED ■ ISO 9001 CERTIFIED ■ A2LA ACCREDITED to ISO 17025

© 2018 PCB Group, Inc. Specifications are subject to change without notice in the interest of constant product improvement. PCB®, ICP®, TORKDISC®, IMI® are registered trademarks of PCB Group, Inc. in the United States. SoundTrack LXT® is a registered trademark of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. SensorLineSM is a servicemark of PCB Group, Inc.

TM-AC-MICS-INTL-0618

Printed in U.S.A.

PCB PIEZOTRONICS, INC. is a designer, manufacturer, and global supplier of accelerometers, microphones, force, torque, load, strain, and pressure sensors, as well as the pioneer of ICP® technology. This instrumentation is used for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, OEM applications, and more. Our Platinum Stock Sensors program ensures fast shipment of over 10,000 sensors that are covered by a Lifetime Warranty. With a support team of Customer Service Representatives and Application Engineers, PCB® proudly stands behind their products with the services you value most, including 24-hour technical support, a global distribution network, and the industry's only commitment to **Total Customer Satisfaction**. Visit us at www.pcb.com.

Visit us at www.pcb.com