

Model Number
SEN020

TRIAxIAL ICP® ACCELEROMETER

Revision: F

Performance

	ENGLISH	SI	Notes
Voltage Sensitivity ($\pm 20\%$)	1 mV/g	0.1 mV/(m/s ²)	
Measurement Range	± 1500 g pk	± 14715 m/s ² pk	
Frequency Range (-5%) (y or z axis)	0.5 to 2500 Hz	0.5 to 2500 Hz	[2]
Frequency Range (-5%) (x axis)	0.5 to 3000 Hz	0.5 to 3000 Hz	[2]
Resonant Frequency	≥ 25 kHz	≥ 25 kHz	
Broadband Resolution (1 to 10000 Hz)	0.005 g rms	0.05 m/s ² rms	[1]
Non-Linearity	$\leq 1\%$	$\leq 1\%$	[3]
Transverse Sensitivity	$\leq 5\%$	$\leq 5\%$	

Environmental

Overload Limit (Shock)	± 7000 g pk	± 68600 m/s ² pk	
Temperature Range (Operating)	-65 to +250 °F	-54 to +121 °C	
Base Strain Sensitivity	0.001 g/ $\mu\epsilon$	0.01 (m/s ²)/ $\mu\epsilon$	[1]

Electrical

Excitation Voltage	20 to 30 VDC	20 to 30 VDC	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	
Output Impedance	≤ 100 Ohms	≤ 100 Ohms	
Output Bias Voltage	8 to 12 VDC	8 to 12 VDC	
Discharge Time Constant	1.0 to 2.5 s	1.0 to 2.5 s	
Settling Time (within 10% of bias)	< 10 s	< 10 s	
Spectral Noise (1 Hz)	700 $\mu\text{g}/\sqrt{\text{Hz}}$	6867 ($\mu\text{m}/\text{s}^2$)/ $\sqrt{\text{Hz}}$	[1]
Spectral Noise (10 Hz)	250 $\mu\text{g}/\sqrt{\text{Hz}}$	2453 ($\mu\text{m}/\text{s}^2$)/ $\sqrt{\text{Hz}}$	[1]
Spectral Noise (100 Hz)	170 $\mu\text{g}/\sqrt{\text{Hz}}$	1668 ($\mu\text{m}/\text{s}^2$)/ $\sqrt{\text{Hz}}$	[1]
Spectral Noise (1 kHz)	50 $\mu\text{g}/\sqrt{\text{Hz}}$	491 ($\mu\text{m}/\text{s}^2$)/ $\sqrt{\text{Hz}}$	[1]

Physical

Sensing Element	Ceramic	Ceramic	
Sensing Geometry	Shear	Shear	
Housing Material	Titanium	Titanium	
Sealing	Hermetic	Hermetic	
Size (Height x Length x Width)	0.55 x 0.80 x 0.55 in	14.0 x 20.3 x 14.0 mm	
Weight	0.37 oz	10.5 gm	[1]
Electrical Connector	1/4-28 4-Pin	1/4-28 4-Pin	
Electrical Connector Position	Side	Side	
Mounting Thread	10-32 Female	10-32 Female	




Notes

- [1] Typical
- [2] Upper frequency response is ± 500 Hz from the specified value
- [3] Zero-based, least-square, straight line method

Supplied Accessories

- NIST Traceable Calibration Certificate
- 081B05 Mounting Stud (10-32 to 10-32) (1)

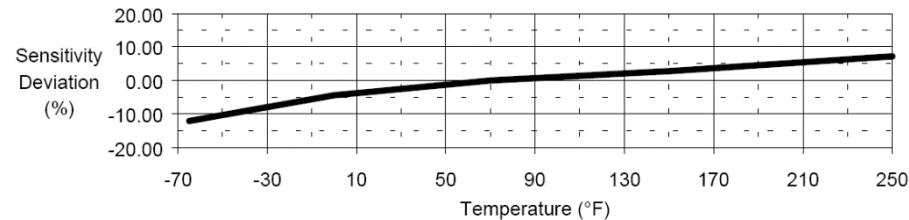

All specifications are at room temperature unless otherwise specified
 In the interest of constant product improvement, we reserve the right to change specifications without notice.
 ICP® is a registered trademark of PCB Piezotronics, Inc.



3425 Walden Ave
 Depew, NY 14043
www.LarsonDavis.com