
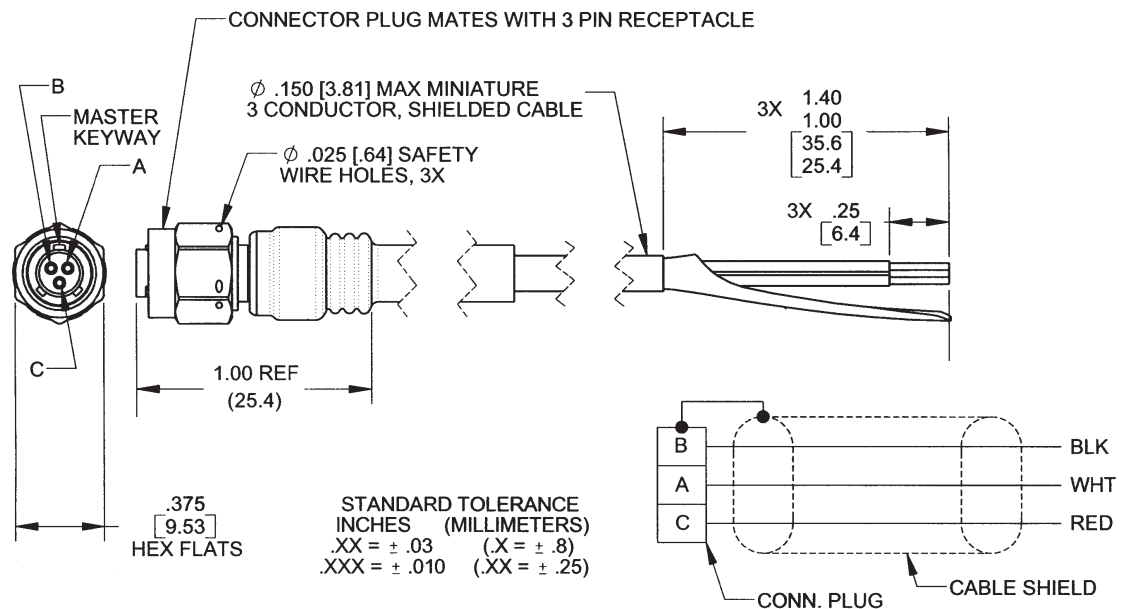


# Three-conductor cable assembly

## Model 6907M2

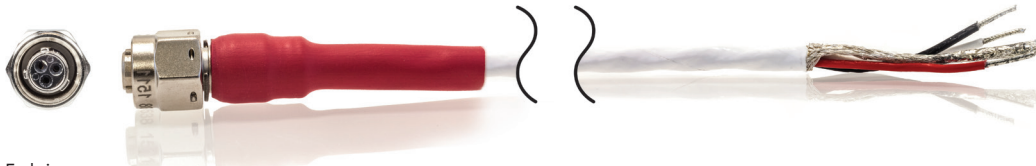

### Key features

- For use with the model 7257AT accelerometer
- Silver plated copper wires and shield
- Rugged moisture resistant connector with gold plated contacts
- Designed for flight test

### Description

The model 6907M2 is a three conductor shielded cable designed to operate with low impedance accelerometers, specifically the Endevco model 7257AT. The cable's shield is connected to the connector's shell. The cable assembly meets the applicable requirements of MIL-STD-202 for vibration, shock, temperature cycling, corrosion and moisture resistance.

# Three-conductor cable assembly | Model 6907M2

All specifications are typical and taken at 75°F (24°C) unless otherwise noted.

Specifications		
Dynamic characteristics	Units	6907M2
Connector 1		Three conductor, 0.3125-28 UNJEF-3B threaded
Dielectric material		Glass reinforced epoxy resin
Pin material		Gold plated beryllium copper
Connector material		Nickel plated aluminum alloy
Strain relief material		Polyolefin
Torque	in-lbs	23±3
Weight	gms	3.12
Lock wire holes		Yes
Connector 2		Pigtails
Cable		
Color (1)		White
Outer jacket		Teflon
Conductor material		Silver plated copper
Conductor size	AWG	22 (19/34)
Primary insulation		Extruded Teflon (FEP)
Colors		Red, white and black
Cable type		3 conductor, shielded 90% min.
Diameter	in (mm)	0.150 (3.81) max.
Shield material		Silver plated copper
Cable weight	gms/ft	8.0
Bend radius	in (mm)	0.5 (12.7) max.
Raw cable part number		EW1059
Environmental characteristics		
Minimum temperature	°F (°C)	-67 (-55)
Maximum temperature	°F (°C)	257 (125)
Shock	g peak	100
Sinusoidal vibration	g peak	15
Electrical		
Insulation resistance	G Ω	1
Vibration		MIL-STD-202A, Method 204, condition B
Shock		MIL-STD-202 Method 202
Temperature cycling		MIL-STD-202, Method 102, condition C
Length tolerance tabulation		
Length inches (millimeters)	Tolerance inches (millimeters)	
Up to 12 (304.8)	+ 1.0 (25.4)	
13 to 36 (330.2 to 914)	+ 2.0 (50.8)	
37 to 120 (939.8 to 3.05 meters)	+ 4.0 (101.6)	
Over 120 (3.05 meters)	+4 (101.6) per 120 (3.05) or part thereof (+12 (3.05) = maximum tolerance)	

## Notes

- Small color variations may occur during normal batch processing, but have no impact on product performance.

## Ordering information

- Specify as 6907M2/XXX where XXX = length in inches
- Standard lengths, in inches, is: 120
- Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.



3425 Walden Avenue, Depew, NY 14043 USA

endevco.com | sales@endevco.com | 866 363 3826

© 2022 PCB Piezotronics - all rights reserved. PCB Piezotronics is a wholly-owned subsidiary of Amphenol Corporation. Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc., which is a wholly-owned subsidiary of PCB Piezotronics, Inc. Accumetrics, Inc. and The Modal Shop, Inc. are wholly-owned subsidiaries of PCB Piezotronics, Inc. IMI Sensors and Larson Davis are Divisions of PCB Piezotronics, Inc. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of PCB Piezotronics, Inc., PCB Piezotronics of North Carolina, Inc. (d/b/a Endevco), The Modal Shop, Inc. or Accumetrics, Inc. Detailed trademark ownership information is available at [www.pcb.com/trademarkownership](http://www.pcb.com/trademarkownership).

EDV-DS-6907M2-0422