
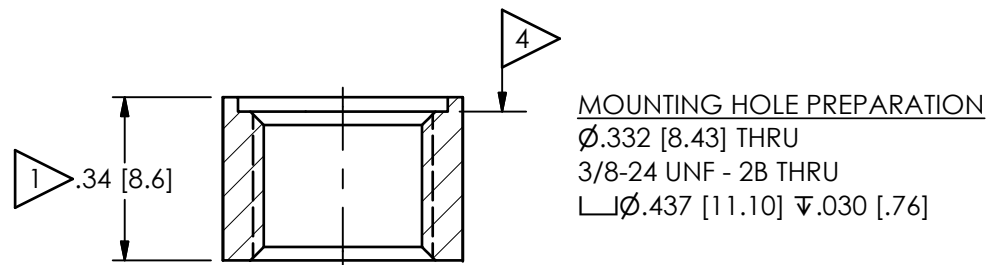
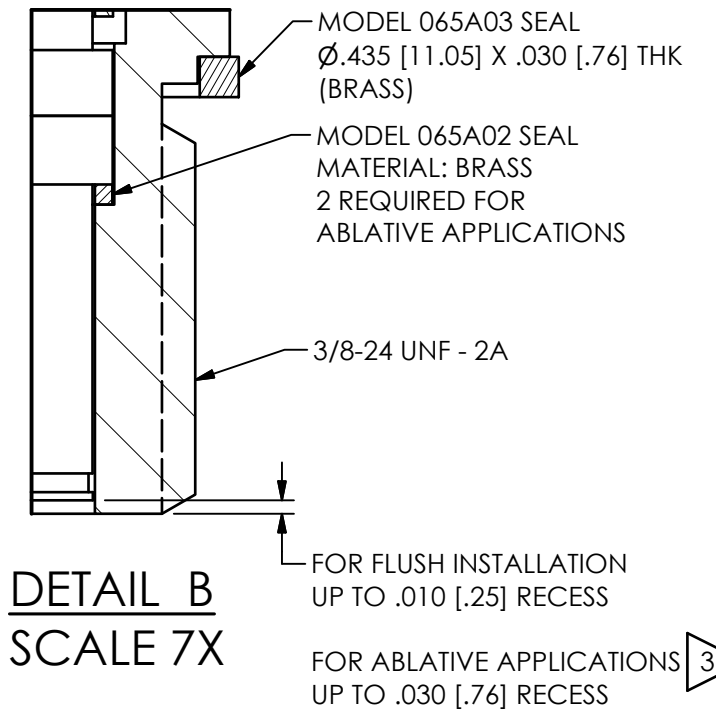
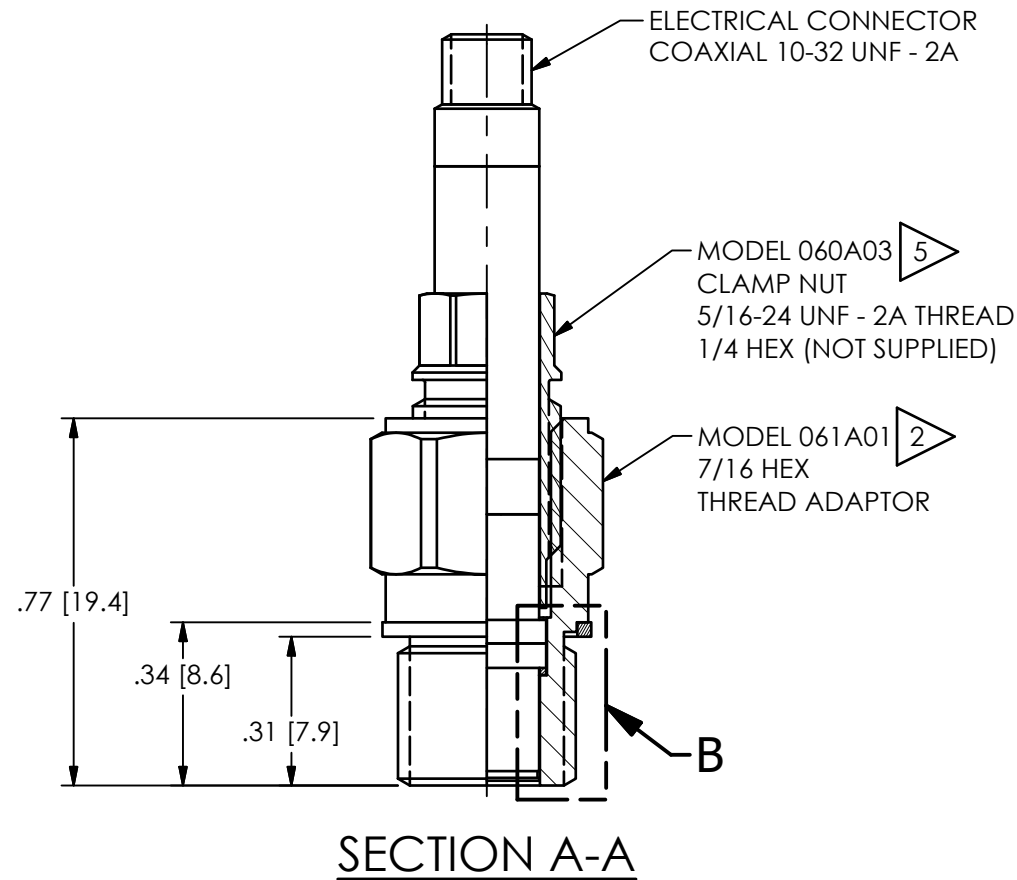


061-1010-90

PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.

REVISIONS		
REV	DESCRIPTION	DIN
E	UPDATED NOTES & ADDED DETAIL VIEW	53692



- 5 MOUNTING TORQUE ON 1/4 HEX, 25-35 IN-LBS [2.82-3.95 N-m]
- 4 SEAL SURFACE MUST BE FLAT AND FREE OF TOOL MARKS WITH A MIN SURFACE FINISH OF 63
- 3 RTV ABLATIVE COATING IS APPLIED TO THE DIAPHRAGM FOR FLASH TEMPERATURE PROTECTION, REPLACE WITH MOMENTIVE RTV106 ADHESIVE SEALANT BLACK VINYL ELECTRICIANS TAPE HAS ALSO BEEN FOUND TO BE AN EFFECTIVE ABLATIVE MATERIAL AS IS DC-4 SILICONE GREASE
- 2 MOUNTING TORQUE ON 7/16 HEX, 5-8 FT-LBS [6.78-10.85 N-m]
- 1 ABOVE INSTALLATION SHOWN FOR WALL THICKNESS OF .34 [8.64], C'BORE THICKER WALLS Ø.75 [19.05] TO CLEAR 7/16 HEX AND ALLOW FOR SOCKET WRENCH

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN		CHECKED		ENGINEER	
DIMENSIONS IN INCHES		NJF	03/17/23	JJF	03/17/23	RF	03/17/23
DECIMALS XX ±.01 XXX ±.005		TITLE		INSTALLATION DRAWING MODEL 061A01 THREAD ADAPTOR			
DIMENSIONS IN MILLIMETERS [IN BRACKETS]		CABLE TOLERANCES IN ENGLISH		CABLE TOLERANCES IN METRIC			
DECIMALS X ±0.3 XX ±0.13		1" ≤ LENGTH < 1' = +1' / - 0		2.54cm ≤ LENGTH < 30.5cm = +2.54cm / - 0			
ANGLES ± 2 DEGREES		1' ≤ LENGTH < 5' = +2" / - 0		30.5cm ≤ LENGTH < 1.5m = +5.1cm / - 0			
CABLE TOLERANCES IN ENGLISH		5' ≤ LENGTH < 100' = +6" / - 0		1.5m ≤ LENGTH < 30.5m = +15.2cm / - 0			
100' ≤ LENGTH = +1' / - 0		FILLETS AND RADII .003 - .005		FILLETS AND RADII 0.07 - 0.13			
PCB PIEZOTRONICS AN AMPHENOL COMPANY		CODE IDENT. NO. 52681		DWG. NO. 061-1010-90		SCALE: 2.5X SHEET 1 OF 1	