

**Model Number**  
357B63

# CHARGE OUTPUT ACCELEROMETER

Revision: NR  
ECN #: 48949

	ENGLISH	SI	
<b>Performance</b>			
Sensitivity(± 10 %)	.53 pC/g	.054 pC/(m/s <sup>2</sup> )	
Measurement Range	± 5,000 g pk	± 49,050 m/s <sup>2</sup> pk	
Frequency Range(± 10 %)	10 kHz	10 kHz	[1]
Resonant Frequency	45 kHz	45 kHz	[2]
Non-Linearity	≤ 1 %	≤ 1 %	[3]
Transverse Sensitivity	≤ 3 %	≤ 3 %	
<b>Environmental</b>			
Overload Limit(Shock)	± 5,000 g pk	± 49,050 m/s <sup>2</sup> pk	
Temperature Range	-65 to +1000 °F	-54 to +538 °C	
Temperature Response	See Graph	See Graph	[2]
Base Strain Sensitivity	.003 g/µε	.02 (m/s <sup>2</sup> )/µε	[2]
Radiation Exposure Limit(Integrated Neutron Flux)	1 E10 N/cm <sup>2</sup>	1 E10 N/cm <sup>2</sup>	
Radiation Exposure Limit(Integrated Gamma Flux)	1 E8 rad	1 E8 rad	
<b>Electrical</b>			
Capacitance	60 pF	60 pF	[2]
Insulation Resistance(at 70°F [21°C])	> 1 GOhm	> 1 GOhm	
Insulation Resistance(at 900° F [482°C])	> 1 MOhm	> 1 MOhm	
Output Polarity	Positive	Positive	
Electrical Isolation	Signal Isolated from Case	Signal Isolated from Case	
<b>Physical</b>			
Sensing Element	UHT-12™	UHT-12™	
Sensing Geometry	Shear	Shear	
Housing Material	Inconel	Inconel	
Sealing	Hermetic	Hermetic	
Size (Height x Length x Width)	.4 in x .4 in x .4 in	10.2 mm x 10.2 mm x 10.2 mm	
Weight	.31 oz	8.7 gm	[2]
Electrical Connector	10-32 Coaxial Jack	10-32 Coaxial Jack	
Electrical Connection Position	Side	Side	
Mounting Thread	5-40 Female	5-40 Female	


**OPTIONAL VERSIONS**  
Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used.

**NOTES:**  
[1]Low frequency response is determined by external signal conditioner  
[2]Typical.  
[3]Zero-based, least-squares, straight line method.  
[4]See PCB Declaration of Conformance PS081 for details.

**SUPPLIED ACCESSORIES:**  
Model 64287-01 Mounting Stud 5-40 to 10-32 (2)  
Model ACS-44 Extended amplitude response, upper 5% point to 10% point (requires ACS-1 or equivalent). (1)

Entered: LK	Engineer: JJD	Sales: MC	Approved: NJF	Spec Number:
Date: 07/21/2020	Date: 07/21/2020	Date: 07/21/2020	Date: 07/21/2020	70742

**PCB PIEZOTRONICS** Phone: 716-684-0001  
Fax: 716-684-0987  
E-Mail: info@pcb.com  
3425 Walden Avenue, Depew, NY 14043

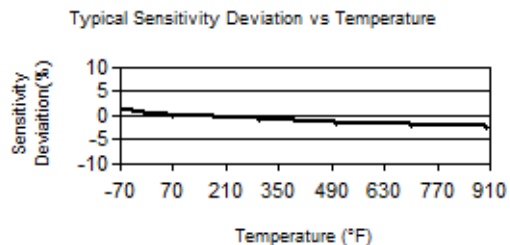

All specifications are at room temperature unless otherwise specified.  
In the interest of constant product improvement, we reserve the right to change specifications without notice.