

422-5010-95

PCB Piezotronics Inc. claims proprietary rights in the information disclosed herein. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.

REVISIONS		
REV	DESCRIPTION	DIN
L	REMOVED ITAR STAMP	37190

B

B


AVAILABLE CONNECTOR OPTIONS:

STANDARD MODEL NUMBER  
 INPUT: 10-32 MICRO DOT JACK  
 OUTPUT: BNC JACK  
 LENGTH: 3.4 [85]

MODEL NO./A  
 INPUT: 10-32 MICRO-DOT JACK  
 OUTPUT: 10-32 MICRO-DOT JACK  
 LENGTH: 3.0 [76]

MODEL NO./C  
 INPUT: 10-32 MICRO-DOT JACK  
 OUTPUT: BNC PLUG  
 LENGTH: 3.2 [81]

MODEL NO./D  
 INPUT: BNC JACK  
 OUTPUT: BNC JACK  
 LENGTH: 4.2 [107]

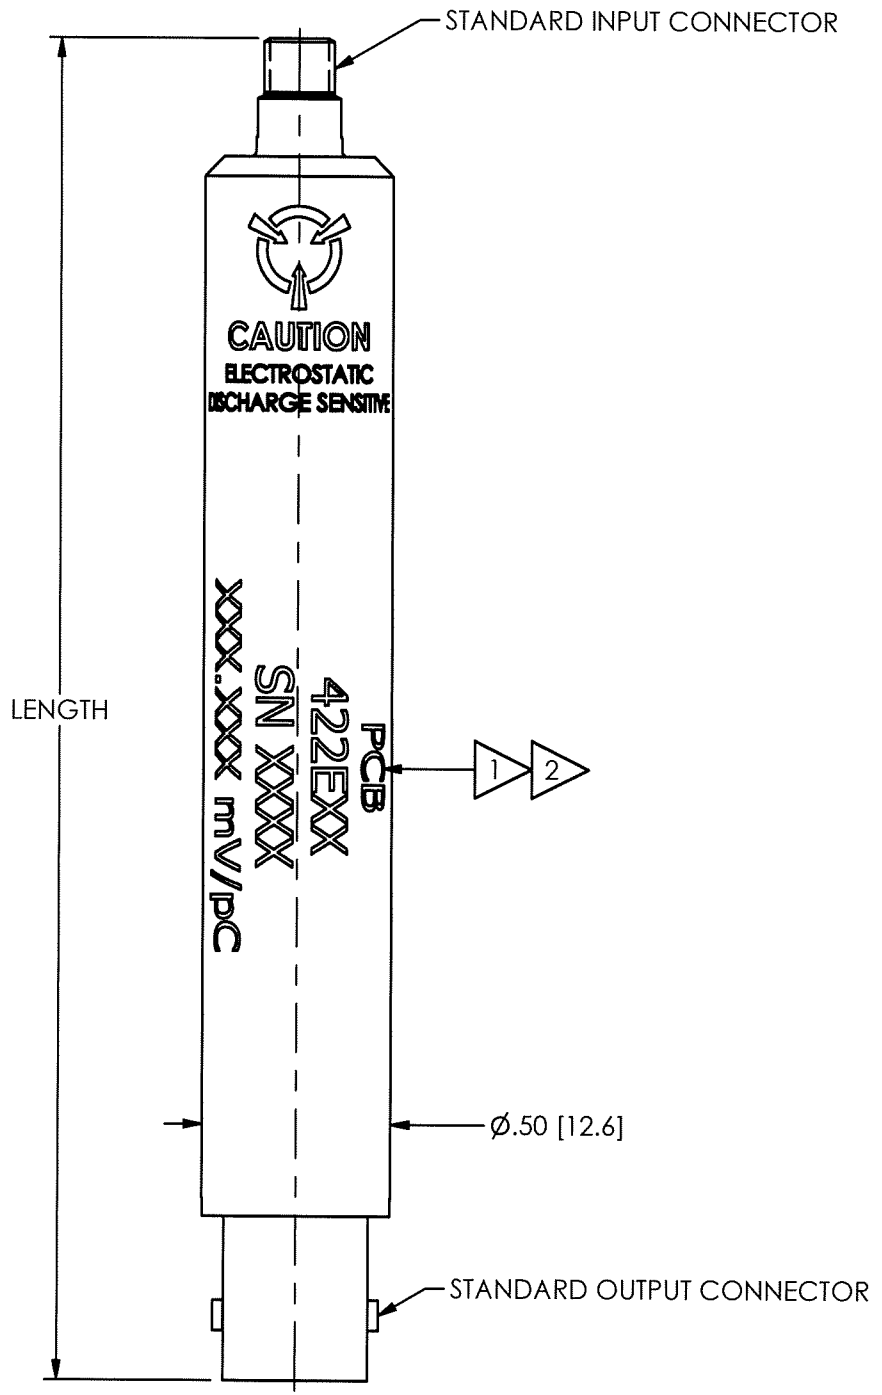

- 2 ETCH WITH "IN ← → OUT" TO INDICATE PROPER ORIENTATION.
- 1 ETCH WITH NORMAL SENSITIVITY, AS IT APPEARS ON SPEC SHEET.

A

A

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN		CHECKED		ENGINEER		<p>3425 WALDEN AVE. DEPEW, NY 14043        (716) 684-0001 E-MAIL: sales@pcb.com</p>
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS [ IN BRACKETS ]	SMB	10/7/11	EeB	10/7/11	BAM	10/7/11	
DECIMALS XX ±.03 XXX ±.010	DECIMALS X ± 0.8 XX ± 0.25	TITLE						
ANGLES ± 2 DEGREES	ANGLES ± 2 DEGREES	OUTLINE DRAWING MODEL 422E SERIES IN-LINE CHARGE AMPLIFIER						CODE IDENT. NO. 52681
FILLETS AND RADII .003 - .005	FILLETS AND RADII 0.07 - 0.13							DWG. NO. 422-5010-95
		SCALE: 2X		SHEET 1 OF 1				