


PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.

67629

REVISIONS		
REV	DESCRIPTION	DIN
B	CHANGED PIGTAIL	47432

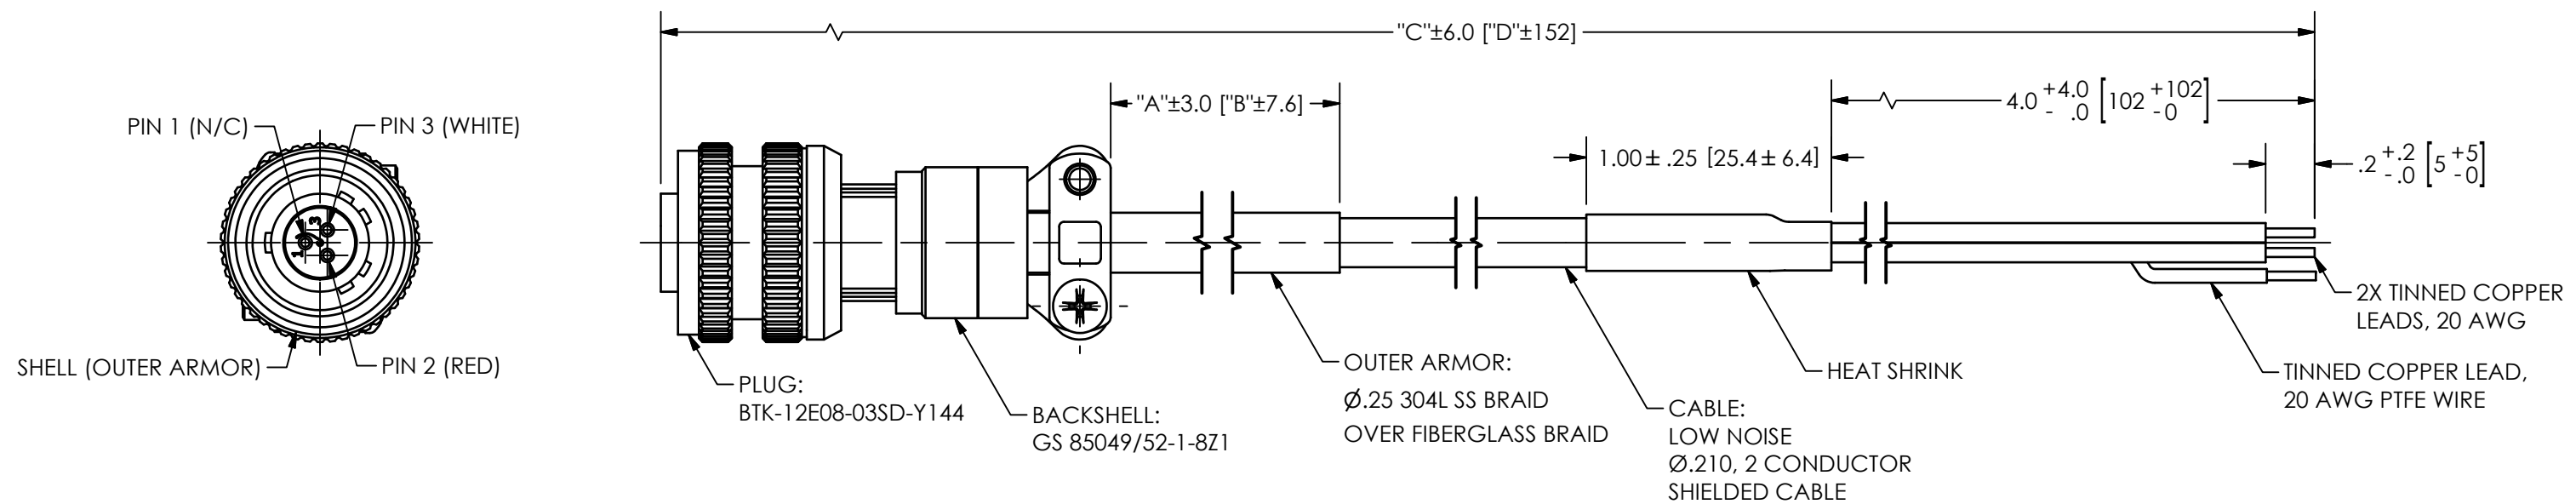

NOISE LEVEL:

≤ 1.5 pC pK-pK PER ISA RP37.2 PARAGRAPH 5.3.2.

CAPACITANCE:

BETWEEN SIGNAL LEADS: 80 pF/FOOT AT 1 kHz MAXIMUM  
EITHER SIGNAL LEAD TO SHIELD: 150 pF/FOOT AT 1 kHz MAXIMUM

RESISTANCE:

BETWEEN SIGNAL LEADS: 1 GΩ MINIMUM AT 100 VDC  
EITHER SIGNAL LEAD TO SHIELD: 1 GΩ MINIMUM AT 100 VDC

TEMPERATURE RANGE:

-65°F TO +446°F  
[-54°C TO +230°C]

123.0	3124	1446	36723	045M47A
123.0	3124	1026	26060	045M36B
663.0	16840	1026	26060	045M28B
"A"	"B"	"C"	"D"	MODEL

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN		CHECKED		ENGINEER	
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS [IN BRACKETS]	KRM	3/12/18	KRM	3/12/18	HWK	3/12/18
DECIMALS XX ±.03 XXX ±.010	DECIMALS X ± 0.8 XX ± 0.25	TITLE OUTLINE DRAWING CABLE ASSEMBLY 045M28B, 045M36B, 045M47A					
ANGLES ± 2 DEGREES	ANGLES ± 2 DEGREES						
FILLETS AND RADII .003 - .005	FILLETS AND RADII 0.07 - 0.13						

**PCB PIEZOTRONICS™**  
3425 WALDEN AVE. DEPEW, NY 14043  
(716) 684-0001 E-MAIL: sales@pcb.com

CODE IDENT. NO. 52681  
DWG. NO. 67629

SCALE: 1.5X SHEET 1 OF 1